

CZ

Krok 3 Připevněte hadice a hadici filtrované vody a poté je zasuňte do upevněné základny

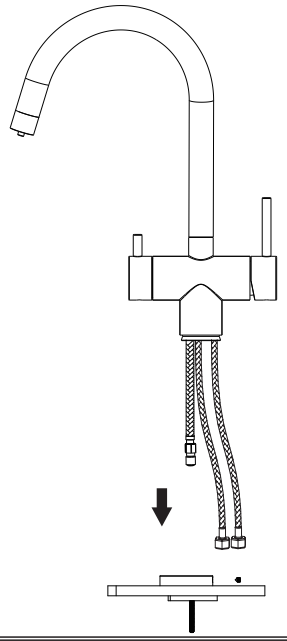


Krok 4 Zajistěte tělo baterie bočním šroubem M5

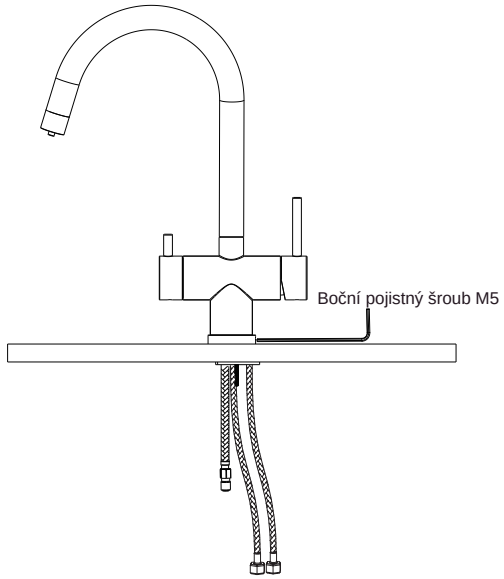


Krok 5

Připojte hadice teplé a studené vody k přívodu vody



Krok 6


Vyzkoušejte trojcestnou baterii a ověřte, že vytéká voda

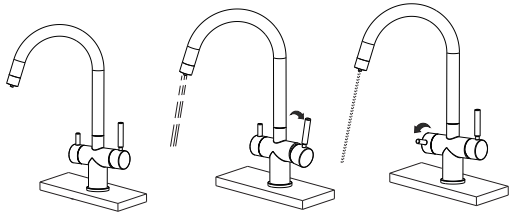

Důležité upozornění:


Před montáží baterie odstraňte a vyčistěte veškerý písek, kal, drť a jiné nečistoty, které mohou ucpat ventilovou kartuši a perlátor. Během stavebních prací se tyto nečistoty často usazují ve vodovodním potrubí, proto před připojením hadic k teplé a studené vodě uzavírací ventily a potrubí vyčistěte a propláchněte.

Schéma připojení systému reverzní osmózy k vaší nové trojcestné baterii.

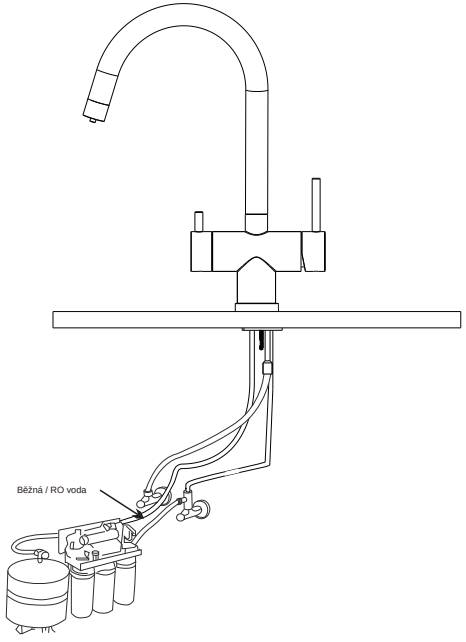

Trojcestná baterie

FC71

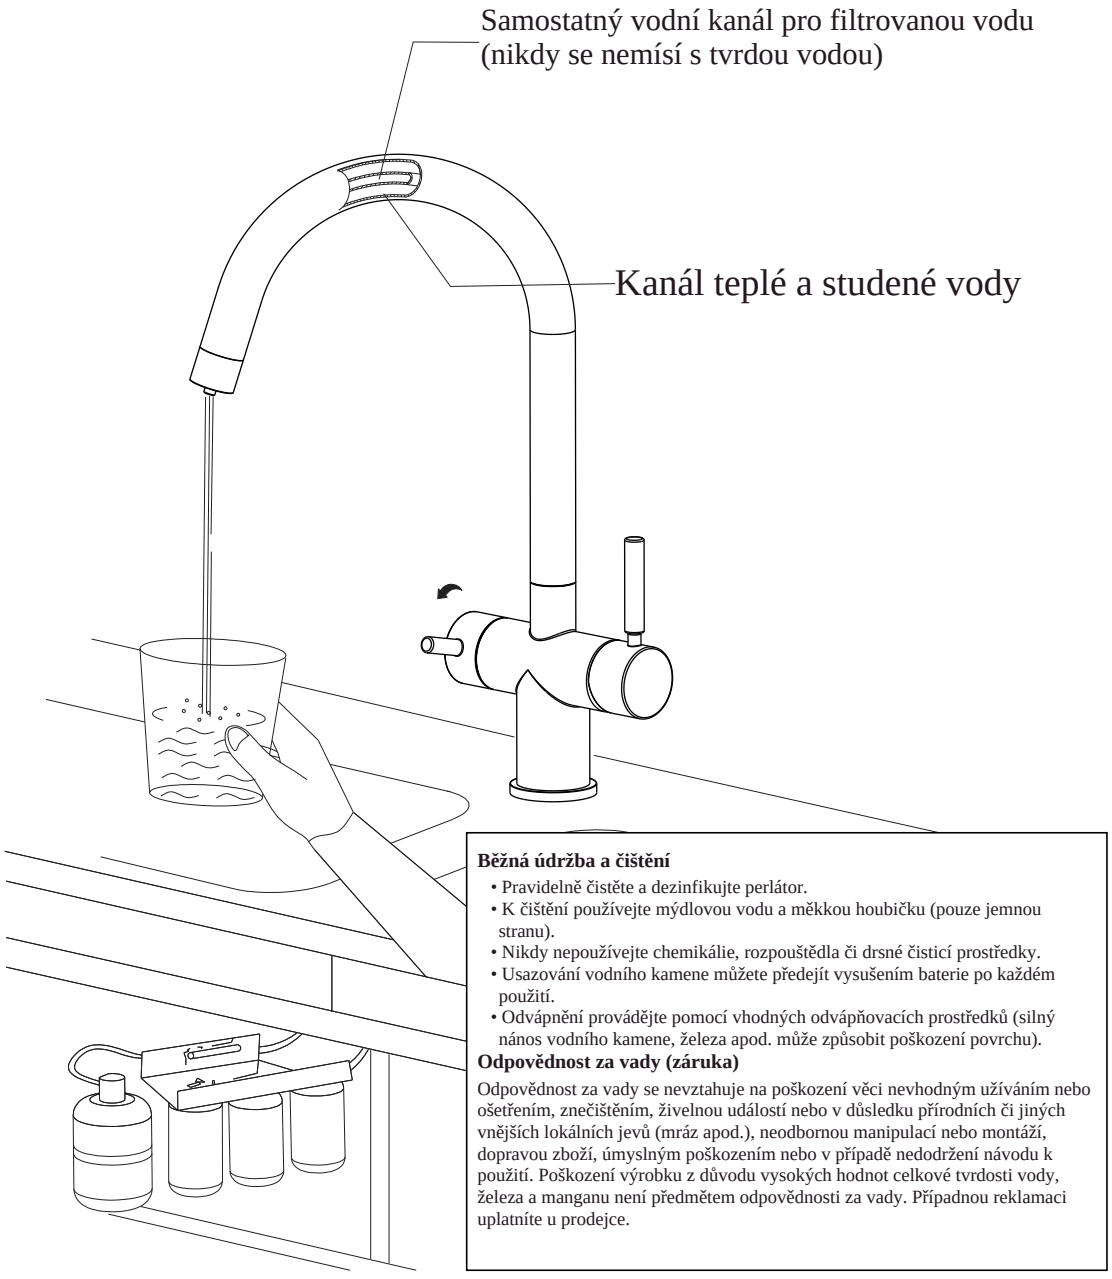

Běžná údržba a čištění


- Pravidelně čistěte a dezinfikujte perlátor.
- K čištění používejte mýdlovou vodu a měkkou houbičku (pouze jemnou stranu).
- Nikdy nepoužívejte chemikálie, rozpouštědla či drsné čisticí prostředky.
- Usazování vodního kamene můžete předejít vysušením baterie po každém použití.
- Odvápnění provádějte pomocí vhodných odvápňovacích prostředků (silný nános vodního kamene, železa apod. může způsobit poškození povrchu).

Odpovědnost za vady (záruka)

Odpovědnost za vady se nevztahuje na poškození věci nevhodným užíváním nebo ošetřením, znečištěním, živelnou událostí nebo v důsledku přírodních či jiných vnějších lokálních jevů (mráz apod.), neodbornou manipulací nebo montáží, dopravou zboží, úmyslným poškozením nebo v případě nedodržení návodu k použití. Poškození výrobku z důvodu vysokých hodnot celkové tvrdosti vody, železa a manganu není předmětem odpovědnosti za vady. Případnou reklamaci uplatníte u prodejce.

CZ

Návod k instalaci

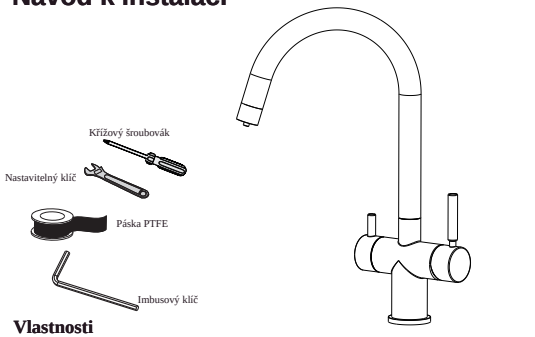

Vlastnosti

Vysoce kvalitní keramické ventilové kartuše
Přípojka push-fit 1/4" pro filtrovanou vodu
Průtok přibližně 7,5 l/min při 3 barech
Připojení hadice G-3/8" nebo G-1/2" dle potřeby


Nářadí k instalaci

Imbusový klíč (2,5 mm)
Teflonová (instalatérská) páska PTFE
Nastavitelný klíč
Křížový šroubovák


Díly montážní základny (shora):

1. Základna baterie
2. Pojistný šroub M5
3. Pojistný šroub M4
4. O-kroužek základny
5. Gumová podložka pojistné matice
6. Pojistná matice
7. Vodicí kolík otvoru

Kusovník montážní základny




Náhradní díly

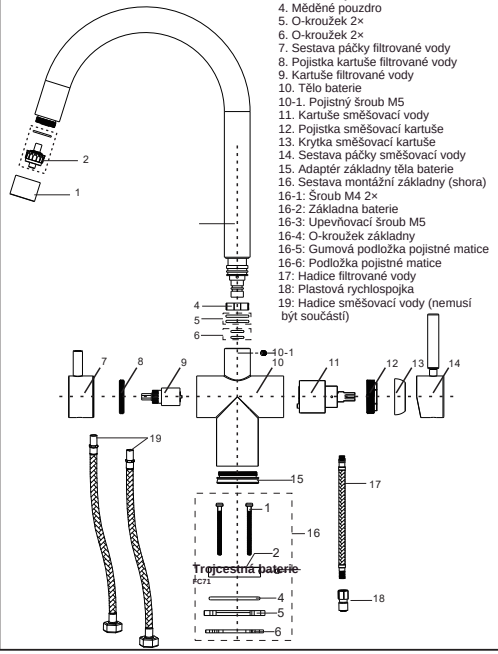

1. Držák perlátoru
2. Perlátor filtrované vody
3. Sestava výtoku
4. Měděné pouzdro
5. O-kroužek 2×
6. O-kroužek 2×
7. Sestava páčky filtrované vody
8. Pojistka kartuše filtrované vody
9. Kartuše filtrované vody
10. Tělo baterie
10-1. Pojistný šroub M5
11. Kartuše směšovací vody
12. Pojistka směšovací kartuše
13. Krytka směšovací kartuše
14. Sestava páčky směšovací vody
15. Adaptér základny těla baterie
16. Sestava montážní základny (shora)
16-1: Šroub M4 2×
16-2: Základna baterie
16-3: Upevňovací šroub M5
16-4: O-kroužek základny
16-5: Gumová podložka pojistné matice
16-6: Podložka pojistné matice
17: Hadice filtrované vody
18: Plastová rychlospojka
19: Hadice směšovací vody (nemusí být součástí)


Důležité upozornění 1

Není nutné vrtat žádné otvory. Obrázek níže znázorňuje rozměry pro pojistné šrouby.

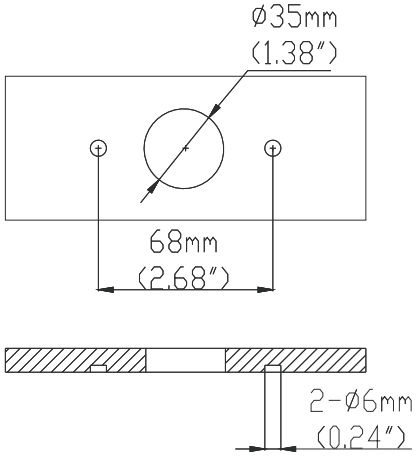


Důležité upozornění 2

Ujistěte se, že jsou hadice baterie připojeny ve správných polohách podle značení níže.

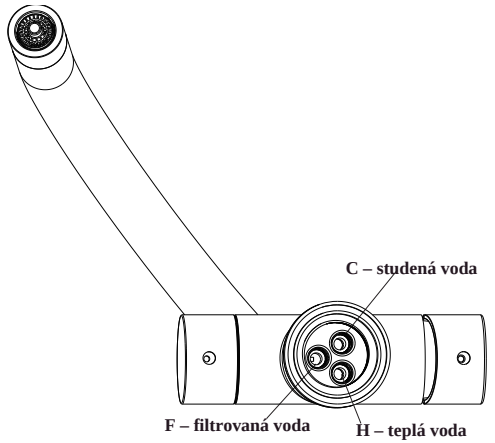


Rozměrový nákres

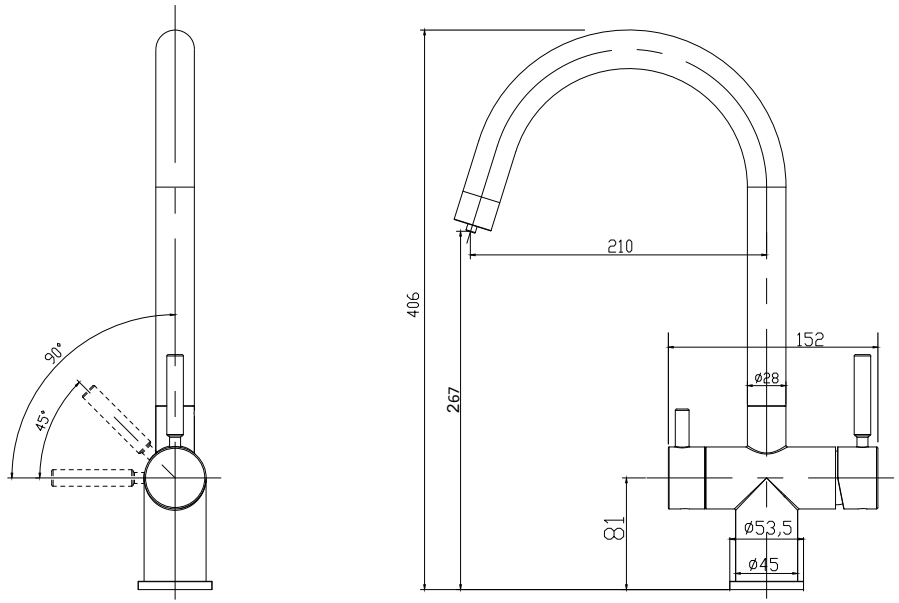


Krok①

Vložte základnu do otvoru v desce dle obrázku níže

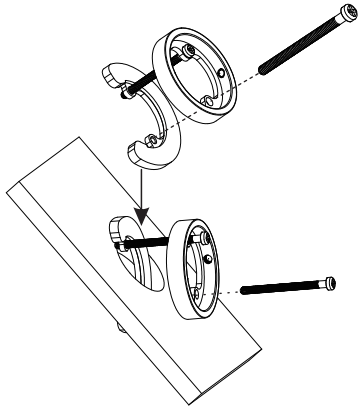

Krok②


Kolíkem přidržte pojistnou podložku zespodu desky

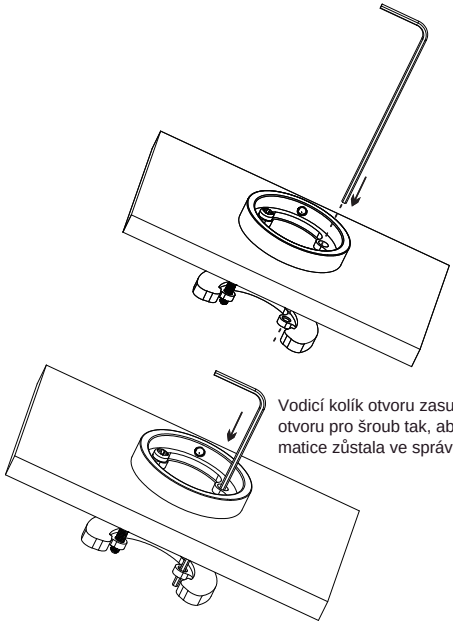


Vodicí kolík otvoru zasuňte do otvoru pro šroub tak, aby pojistná matice zůstala ve správné poloze

EN

Step③ Fixed the hoses&filter water hose then insert into fixed base

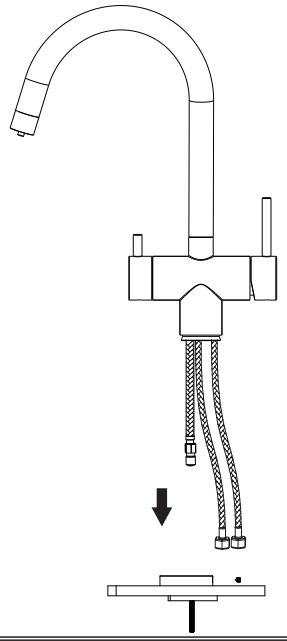


Step④ Locking faucet body by M5 screw at side

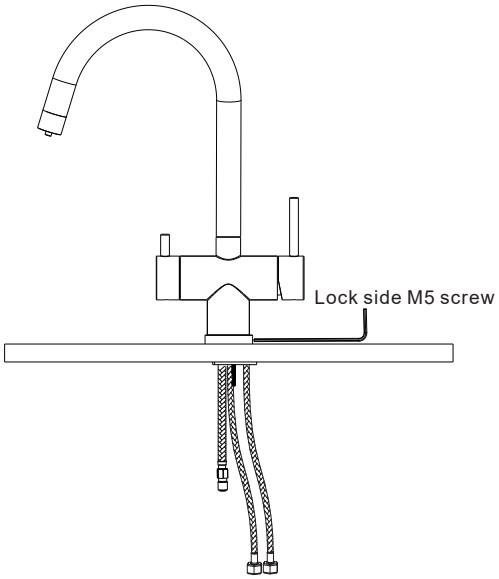


Step⑤

Connect the Hot & Cold Hoses to the inlet water



Step⑥


Test the your 3-Way Tap to ensure it is dispensing water

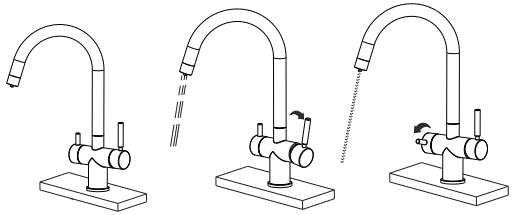


Important Note:

Please ensure any sand, silt, rubbles or anything that may block the valve cartridge and aerator is removed and cleaned before fixing the tap. During construction, the water pipes often end up with these, please ensure the isolation valves / pipes are cleaned / flushed before connecting the hoses to the hot and cold.

Illustration of a Reverse Osmosis System connected to your new 3-Way Tap.

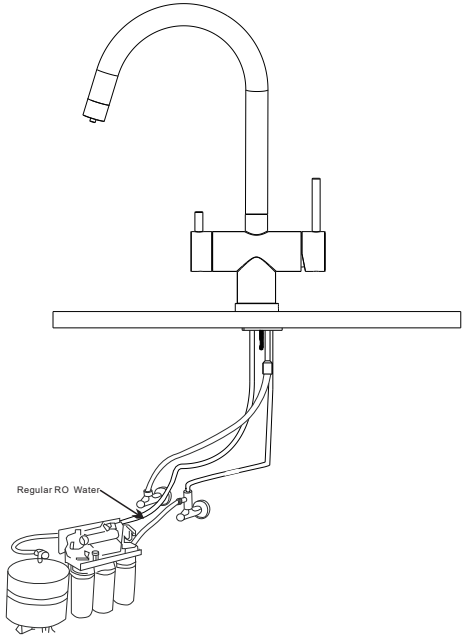

3 Way Kitchen Faucet

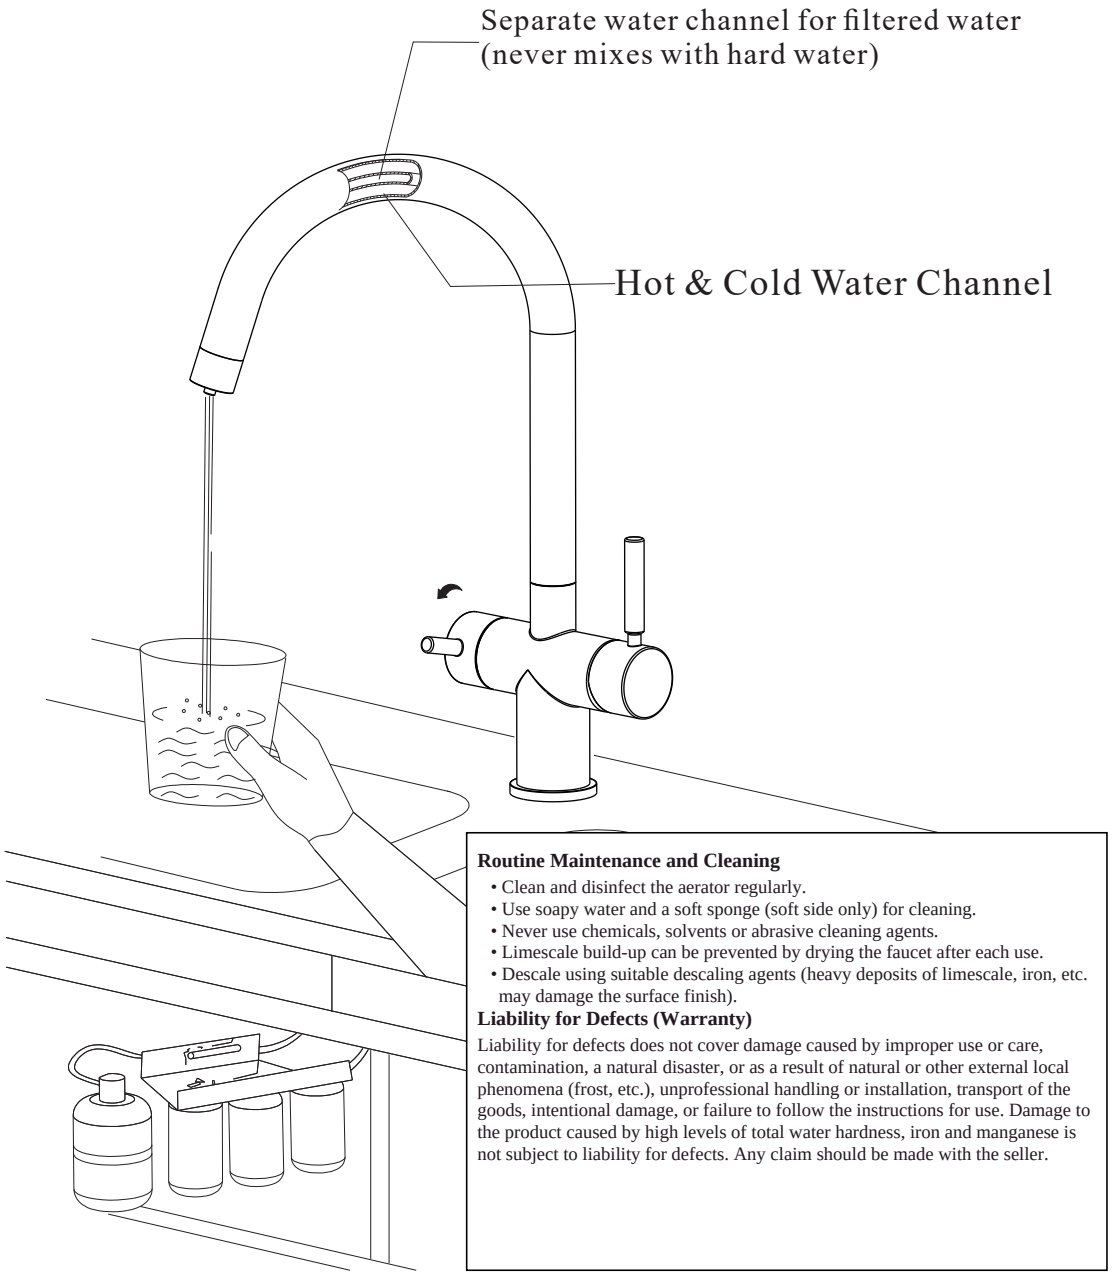

Routine Maintenance and Cleaning


- Clean and disinfect the aerator regularly.
- Use soapy water and a soft sponge (soft side only) for cleaning.
- Never use chemicals, solvents or abrasive cleaning agents.
- Limescale build-up can be prevented by drying the faucet after each use.
- Descale using suitable descaling agents (heavy deposits of limescale, iron, etc. may damage the surface finish).


Liability for Defects (Warranty)

Liability for defects does not cover damage caused by improper use or care, contamination, a natural disaster, or as a result of natural or other external local phenomena (frost, etc.), unprofessional handling or installation, transport of the goods, intentional damage, or failure to follow the instructions for use. Damage to the product caused by high levels of total water hardness, iron and manganese is not subject to liability for defects. Any claim should be made with the seller.


EN

Installation Manual





On Top Base Bom



Features

High Quality Ceramic Valve Cartridges
1/4" Push Fit Connector for Filtered Water
Flow Rate approx 7.5L pm @ 3Bar
G-3/8 or G-1/2 Hose pipe connector as required


Tools for Installation

Allen Key (2.5mm)
PTFE (Plumbers) Tape
Monkey Wrench
Phillips screwdriver

On top installing base list:

1. Faucet Base
2. M5 Lock screw
3.M4 lock bolt
4.Base O-ring
5.Lock nut rubber washer
6.Lock nut
7.Hole holder pin


Replacement Parts

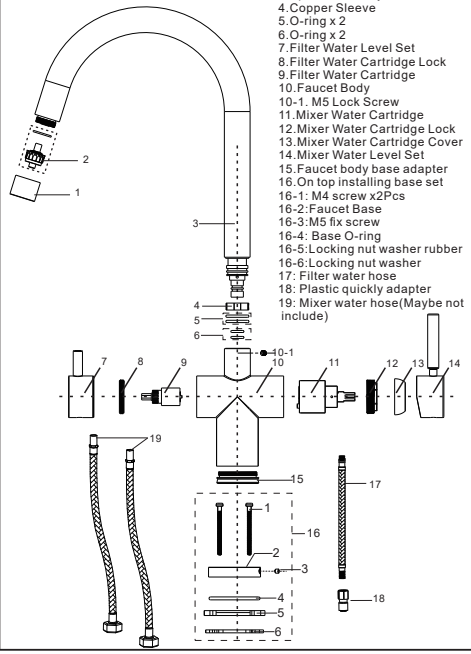

1.Bubbles holder
2.Filter Water Bubbles
3.Spout Assembly
4.Copper Sleeve
5.O-ring x 2
6.O-ring x 2
7.Filter Water Level Set
8.Filter Water Cartridge Lock
9.Filter Water Cartridge
10.Faucet Body
10-1. M5 Lock Screw
11.Mixer Water Cartridge
12.Mixer Water Cartridge Lock
13.Mixer Water Cartridge Cover
14.Mixer Water Level Set
15.Faucet body base adapter
16.On top installing base set
16-1: M4 screw x2Pcs
16-2:Faucet Base
16-3:M5 fix screw
16-4: Base O-ring
16-5:Locking nut washer rubber
16-6:Locking nut washer
17: Filter water hose
18: Plastic quickly adapter
19: Mixer water hose(Maybe not include)


Important Note 1

You do not need to drill any holes, the illustration below demonstrate measurements of the lock nut screws

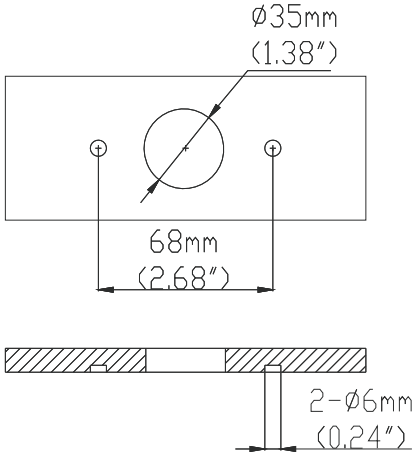


Important Note 2

Please ensure the tap hoses are attached to the correct positions as marked below.

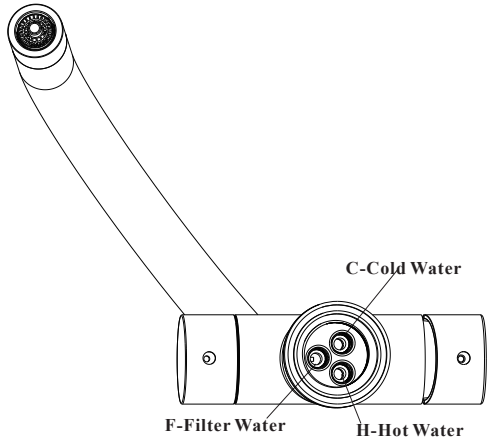


Profile Drawing

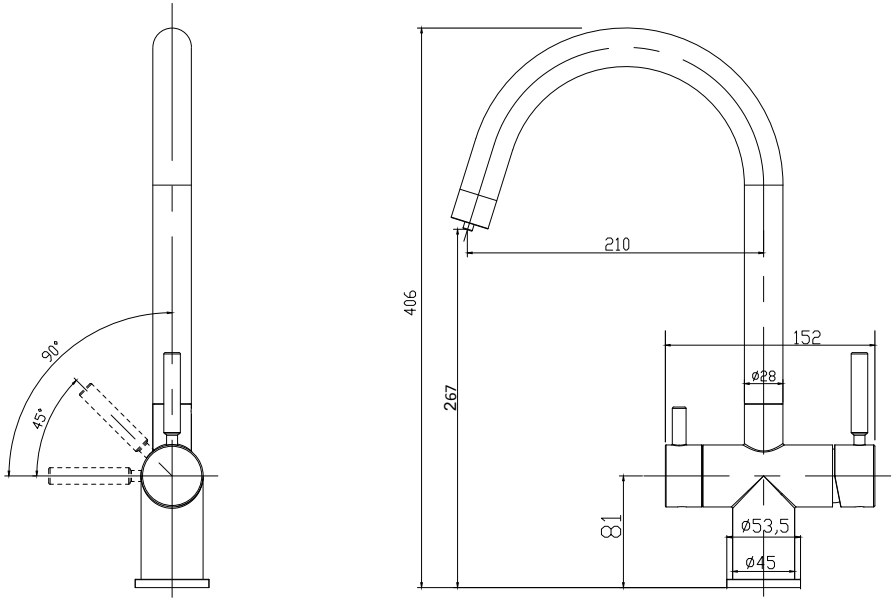


Step ①

Insert the base set to the counter top hole as below

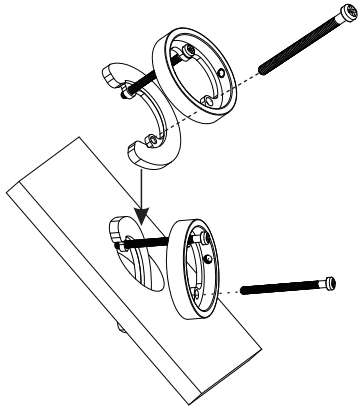

Step ②

Using a pin hold the locking washer under the top

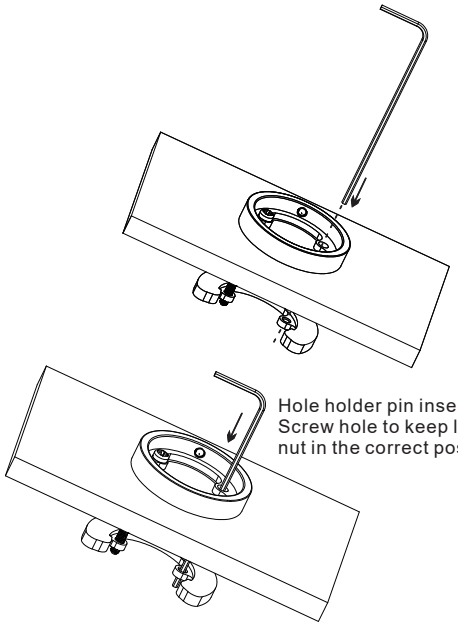

Hole holder pin insert in Screw hole to keep lock nut in the correct position